CONTROL / SIREN SYSTEMS

OPTI-LINK

Be Heard, Be Seen, Be Woodway

The OPTI-LINK system provides an enhanced and intuitive control interface between the driver and the emergency equipment of the vehicle. The large switches are easily programmable and can be set to latching or momentary. Their flexible legend design enables the user to individually configure the control panel to meet their specific needs. The OPTI-LINK is designed to allow the operator to quickly activate equipment associated with emergency response situations.
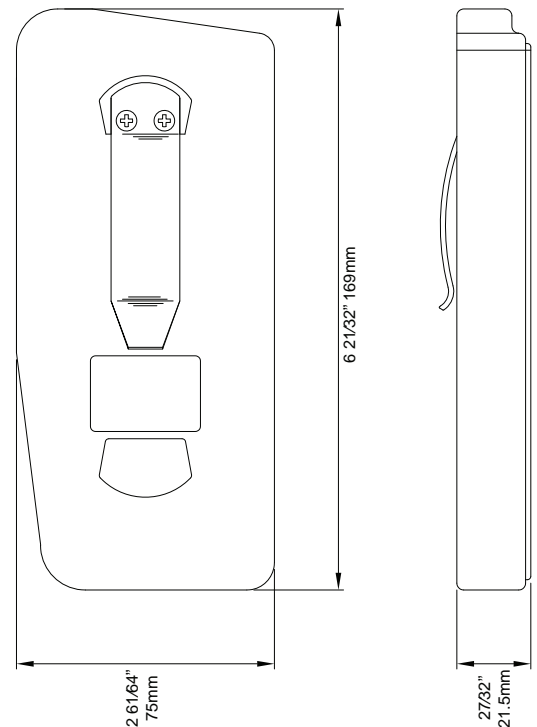
2 Year Warranty **12 VOLT + -** **R10 ✓**

KEY FEATURES:

• Individual switches with clear interchangeable legends.
• Bespoke legends are available to order. Switch positions may be interchanged by the installer.
• Switches 1-12 are programmable for latching, momentary and mutually exclusive action. '999' and 'ARRIVAL' switches are installer programmable to operate a pre-selected switch configuration.
• Back lighting on all switches allows switch legends to be easily visible at night. '999' button has blue back lighting for easy identification.
• Auto-dim of active switches in low light conditions minimises driver distraction at night.
• Microphone and PTT (press to talk) switch for PA input when connected to a Woodway BETA amplifier.
• Audible and visual warnings confirm to the operator that a switch is active.
• Sleep mode reduces power draw when the vehicle is not in use to prevent battery drain. The switch panel will then 'wake up' at a pre set voltage, e.g. when the vehicle is started and the battery starts charging or when a switch is activated. An auxiliary relay operates in phase with the sleep mode feature allowing external equipment such as radios to be wired through its contacts.
• Low battery volts visual warning.
• A 'WALK TEST' function allows the operator to confirm that the system and the equipment that it is controlling are functioning.
• Screened coiled cable from keypad to keypad interface minimises interference from hand portable radios.
• Compatible with CenCom Sapphire™ UK

CLKSYS5-12: Control System Opti-link (Full Kit)

DIMENSIONS:

6 21/32" 169mm

2 61/64" 75mm

27/32" 21.5mm

MODEL NUMBERS:

CLKSYS5-12: Control System OPTI-LINK (Full Kit)
ZE0175: OPTI-LINK Switch Panel
ADDOLINKCC: OPTI-LINK with connecting cable for use with CenCom Sapphire™ UK